


## IEC- Normmotoren Masse 700 um

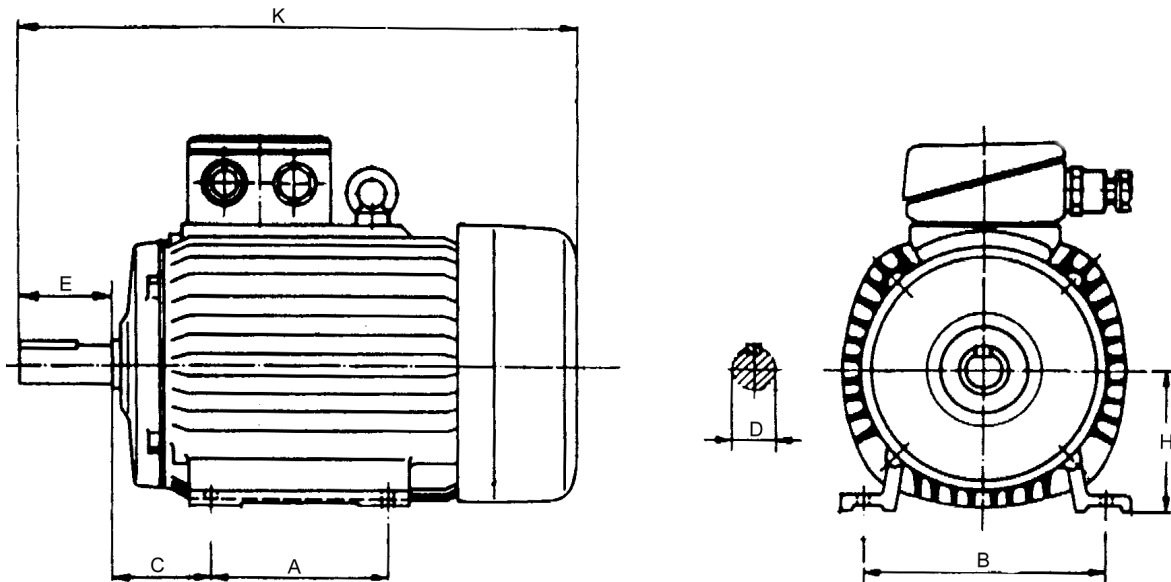

Mass "H" = Wellenmitte bis unterkant Fuss in mm entspricht der IEC Baugrösse (Typ)

IEC Typ	KG ca	KW	A in mm	B in mm	C in mm	D in mm	E in mm	K in mm
160 MA8	90	4	210	254	108	42	110	630
160 MB8	100	5.5	210	254	108	42	110	630
160 L8	120	7.5	254	254	108	42	110	674
180 L8	165	11	279	279	121	48	110	705
200 L8	255	15	305	318	133	55	110	810
225 S8	280	18.5	286	356	149	60	140	860
225 M8	315	22	311	356	149	60	140	885
250 M8	430	30	349	406	168	65	140	990
280 S8	525	37	368	457	190	75	140	1040
280 M8	580	45	419	457	190	75	140	1090
315 S8	720	55	406	508	216	80	170	1210
315 MA8	755	75	457	508	216	80	170	1210
315 MB8	845	90	457	508	216	80	170	1210